



January 16, 2026

Technical Service Bulletin – 48

Mustang Dark Horse R Battery Strap

The installation of an additional battery retention device is required for more robust battery retention.

Action: Install Ford Racing kit number LCR-DH-BHDK.


Part Description	Part Number	Qty	Supplier
Belt & Eyebolt Kit	LCR-DHDK-1	1	Capaldi Development
Flat Washers AN970-7	95229A530	2	McMaster-Carr
7/16 Nylon-Insert Locknut Nut Grade 8	97135A245	2	McMaster-Carr
M6x1.0x50mm 10.9 Hex Head Flange Bolt	93474A375	1	McMaster-Carr






Installation Process:

Remove battery and battery tray. Locate and drill (2) 7/16" holes as shown in the following two photos.

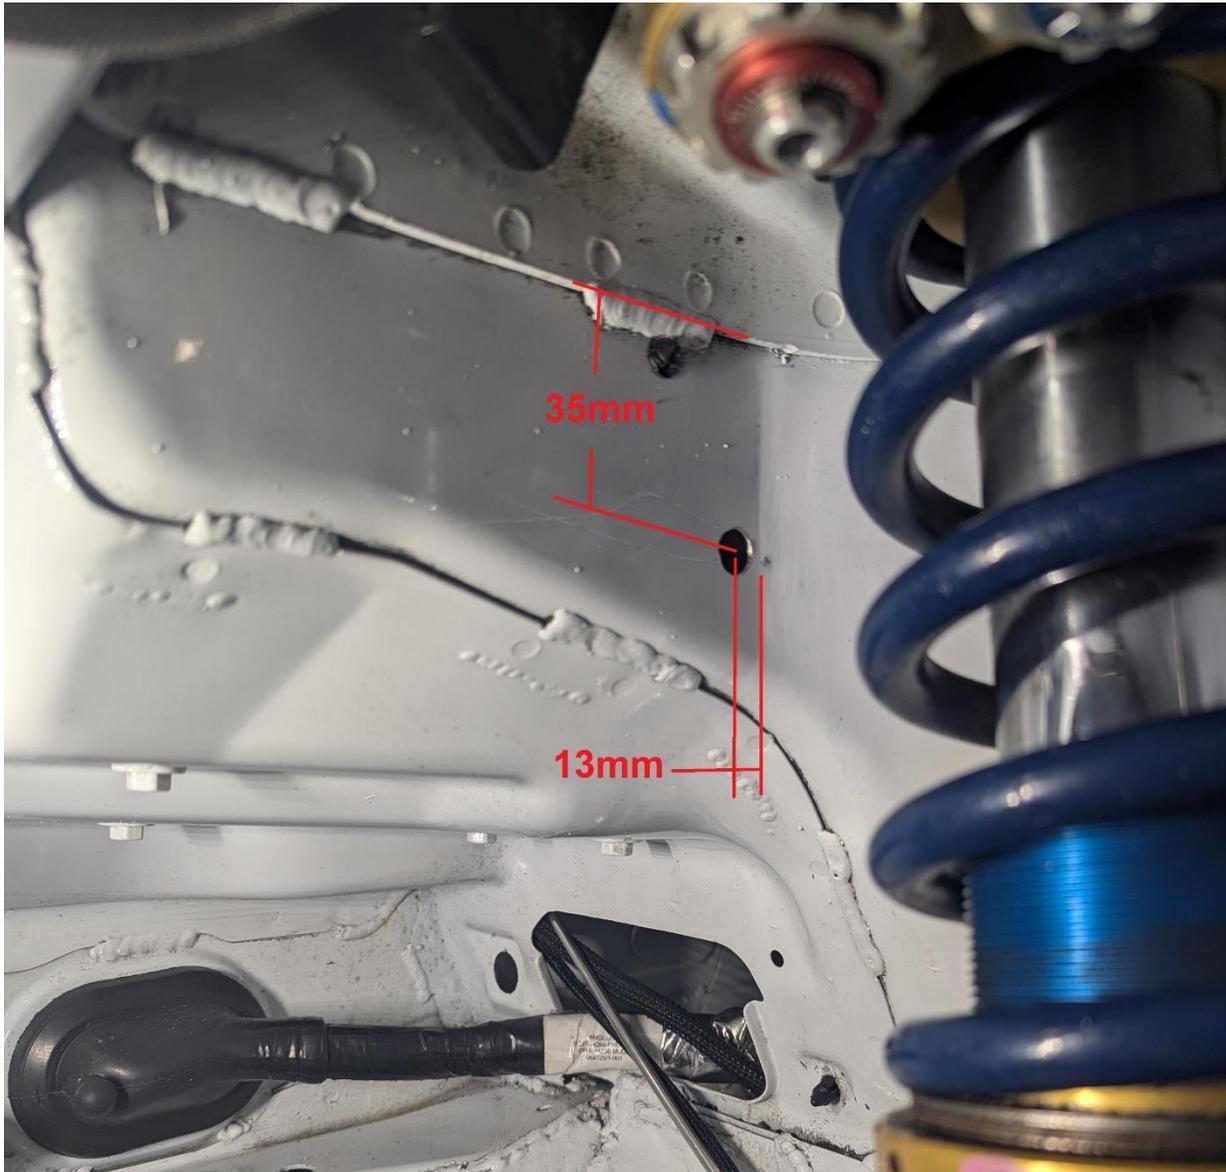


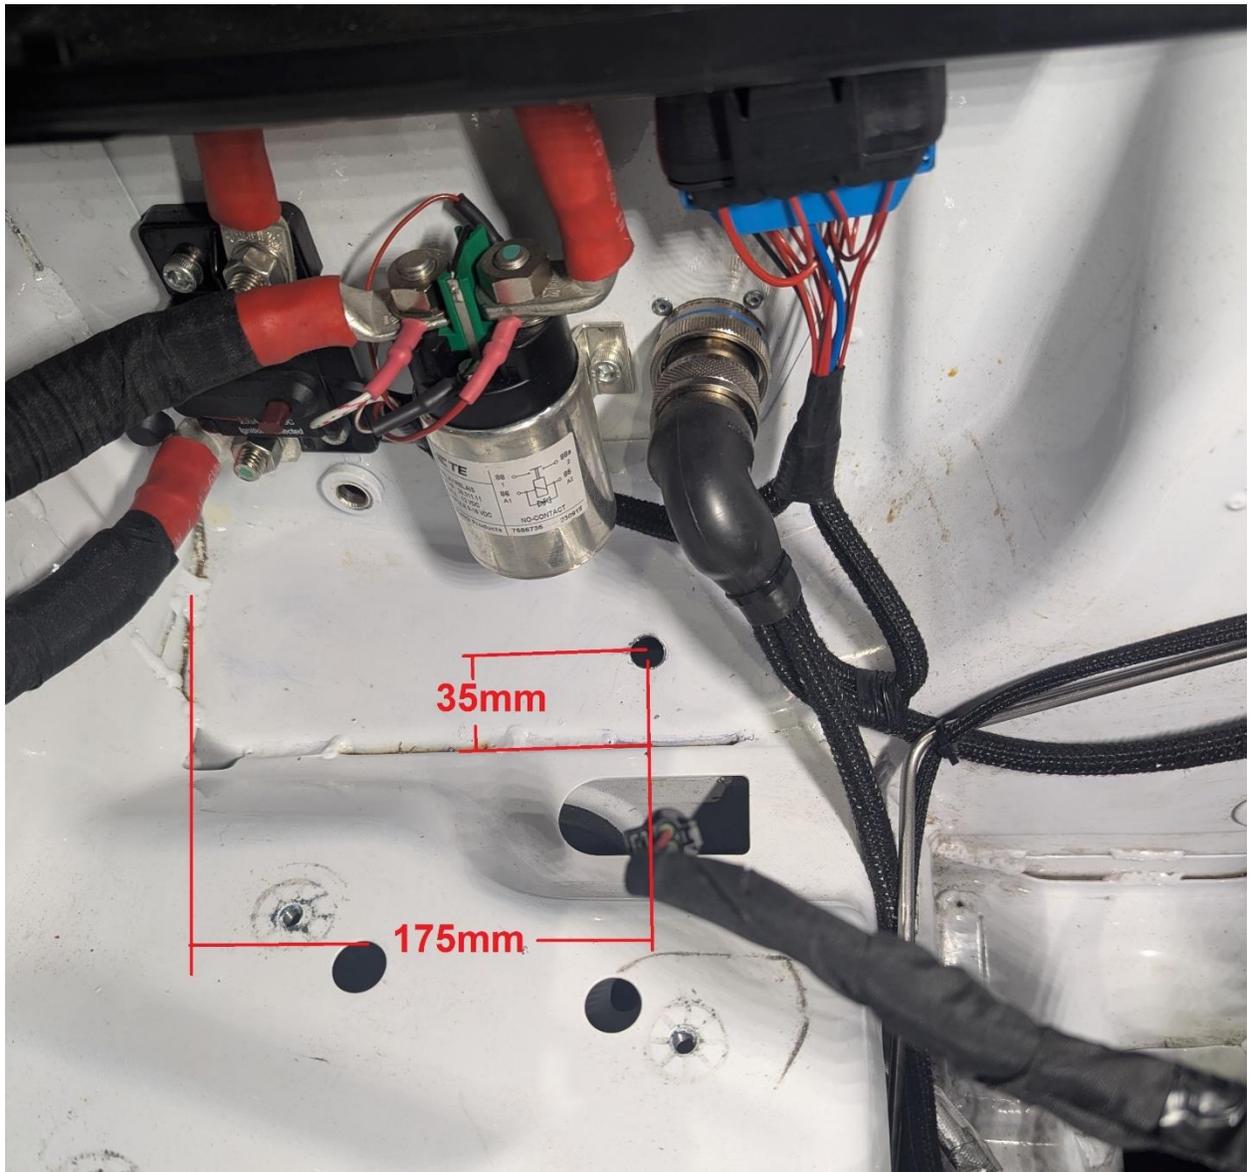



RACING

Install an eyebolt into the drilled hole in the lower cowl with the flat washer and nylon-insert locknut from the interior of vehicle. Tighten the eyebolt in shown orientation.

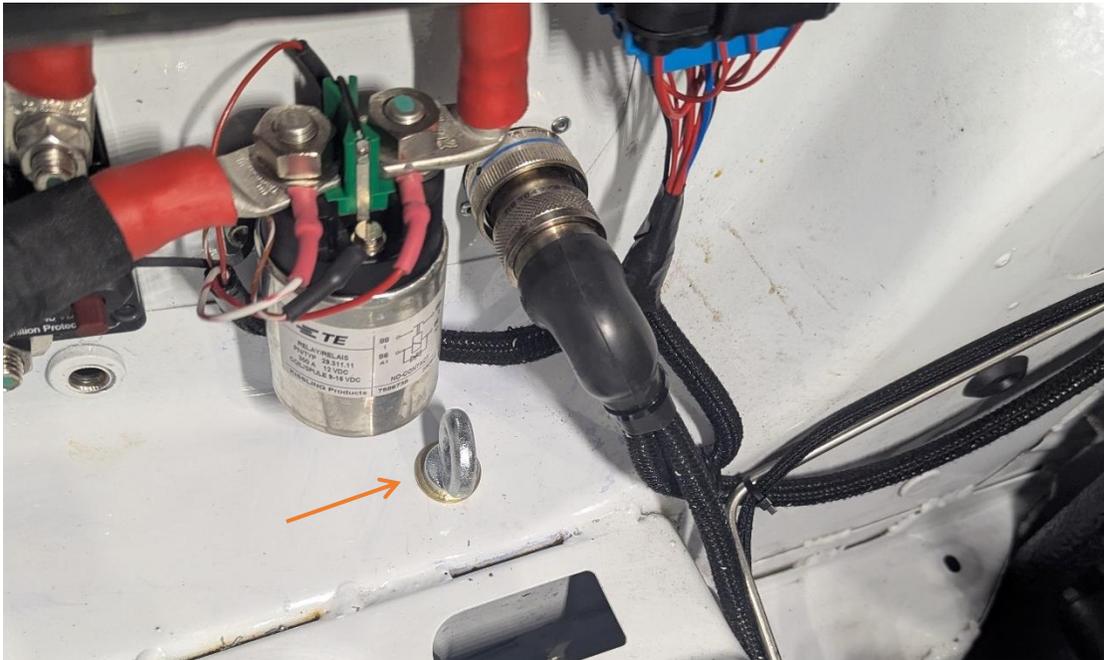



RACING

Install an eyebolt into the drilled hole in strut tower from the engine compartment and loosely install the flat washer and nylon-insert locknut. This will be tightened in a later step. Position the eyebolt in the shown orientation.






Install the long strap to the rearward eyebolt, then install the shorter strap with attached buckle to the forward eyebolt. Re-install the OEM battery tray at this point.





Replace the OEM bolt in the battery retaining block with the supplied hardware.
Install battery and secure with updated retaining block.

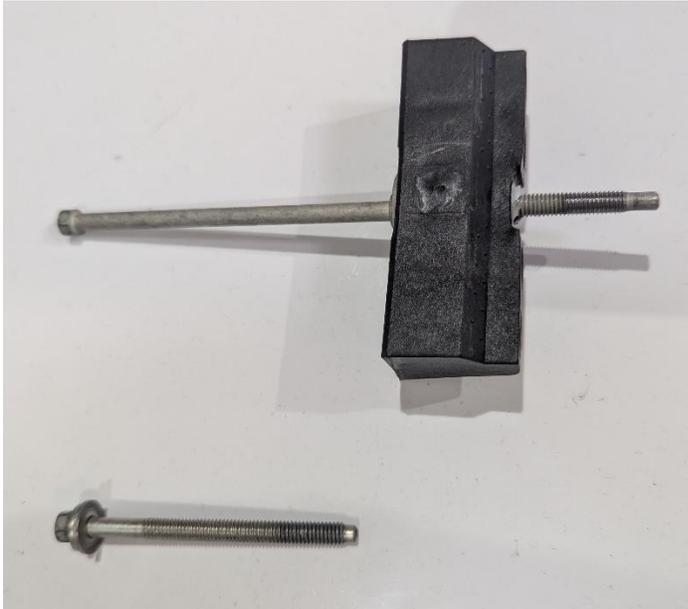



Ensure the forward eyebolt is loose. Connect the straps and pre-tension them snugly to the battery.



Tighten the eyebolt from inside the shock tower to put tension on the belt and secure the assembly in place.



TSB Complete