



August 15, 2026

Technical Service Bulletin – 59

Mustang Dark Horse R Hood/Headlight Seal Update - Required

Purpose: Improved engine compartment sealing

Action: Install 2 bulb seals

Part number: FR-16990-A



Headlight without seal



Headlight with seal

Installation Process:

Note: The bulb seal can be installed with the headlight removed or within the vehicle.

Install with the headlight removed

Clean bulb seal installation surface with wax and grease remover. Area shown in red in the photo below.




Remove the adhesive red cover and install as shown in the photo below.



Install with the headlight in place

Clean the bulb seal mounting surface, as shown in the above section, with grease and wax remover.

Pull back the red adhesive cover 2-3”.

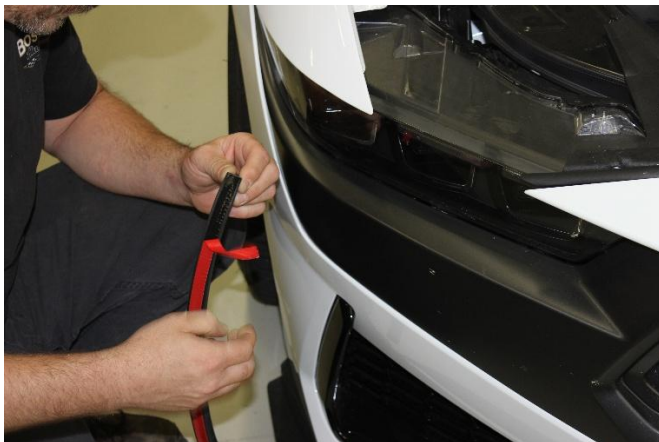

Align the leading edge of the bulb seal with the most forward point on the headlight to get a complete seal. Start installing under top of fascia.



Use a plastic trim tool to feed the bulb seal in place.



Continue pulling back on the red adhesive cover and place the bulb seal in place on the leading edge of the headlight.





Feed the bulb seal under the fender placing the adhesive surface on the leading edge of the headlight. Slowly pull the red adhesive cover as you hold the seal in place with a plastic trim tool.



The bulb seal should sit on the leading edge of the headlight.

